



|             |                                                                                               |
|-------------|-----------------------------------------------------------------------------------------------|
| Materials   | Steel frame canopy and hardware<br>Handblown, sandblasted glass shades and borosilicate beads |
| Dimensions  | 11 3/4 in (29.8 cm) W x 11 3/4 in (29.8 cm) D x 42 in (106.6 cm) H                            |
| Weight      | 30 lbs (13.6 kg)                                                                              |
| Packing     | 24 in (60.9 cm) W x 12 in (30.4 cm) D x 12 in (30.4 cm) H<br>25 lbs (11.3 kg)                 |
| Canopy      | 8 in (11.5 cm) W x 8 in (11.5 cm) D x 1 3/8 in (3.4 cm) H                                     |
| Drop height | 19 7/8 in (50.4 cm) H<br>Custom upon request, adjustable on site                              |
| Lamping     | 1 x G8 socket<br>G8 LED bulbs (provided)<br>2.5W 2700K<br>250 lm                              |

|          |                             |
|----------|-----------------------------|
| Finishes | Frame                       |
|          | Polished chrome             |
|          | Polished brass              |
|          | Polished black nickel       |
|          | Globe glossy or sandblasted |
|          | White smoke                 |
|          | Crepe Brown                 |
|          | Beige                       |
|          | Opal white                  |



Handmade in Los Angeles

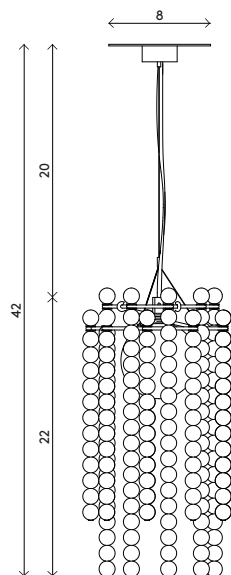

|               |                                                                                                         |
|---------------|---------------------------------------------------------------------------------------------------------|
| Bulb life     | 25,000 hrs                                                                                              |
| Dimming       | 10-100%. Wattage +/- 10%<br>Lumen Values +/- 5Lms<br>CRI +/- 5%<br>Fully tested with LUTRON® DVCL, DVEL |
| Voltage       | 120 V / 240                                                                                             |
| Certification | UL, CE listed<br>Damp rated                                                                             |

Handmade in Los Angeles  
Hardwired