



TUBE

sconce hardwired

Description

The TUBE SCONCE is a versatile slim sconce, our take on a classic vanity fixture. Mounted either vertically or horizontally, the fixture expresses a bold beam of light appropriate for bathroom and hallway installations. UL Listed. ADA Compliant. Damp Rated.

Finish Options

Hewn Brass Hand Finished Bronze Brushed Nickel

Dimensions


Overall Height - 23" Glass Height - 18" Glass Diameter - 2" Backplate Diameter - 5"


Weight

6 lbs

Lamp

16 Watt Integrated LED Panel
100 Watt Equivalent
1600 Lumens
2700K Color Temperature
Triac & ELV Compatible
Dimmable and Flicker-Free
Panel Life 50,000 Hours
UL/CE Listed
Damp Rated

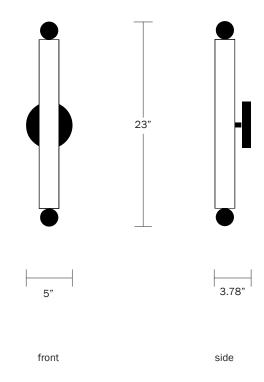

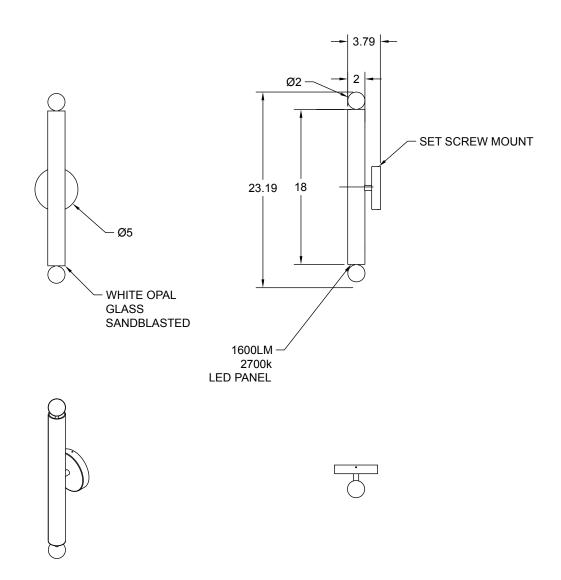



TUBE

pendant hardwired

Description

The TUBE PENDANT disperses a bold beam of light into space, hovering delicately above a counter, table, or hall. Matte blown-glass is playfully offset by two metal balls, presenting a fixture that is both luminous and rhythmic.

UL Listed. Damp Rated.

Finish Options

Hewn Brass Hand Finished Bronze Brushed Nickel

Dimensions

Overall Height Small - 24"

Medium - 36"

Large - 48"

Overall Length - 23"

Glass Length - 18"

Glass Diameter - 2"

Canopy Diameter - 5"

Rod Diameter - .5"


Custom Overal Heights Available

Weight


8 lbs

Lamp

16 Watt Integrated LED Panel
100 Watt Equivalent
1600 Lumens
2700K Color Temperature
Triac & ELV Compatible
Dimmable and Flicker-Free
Panel Life 50,000 Hours
UL/CE Listed
Damp Rated

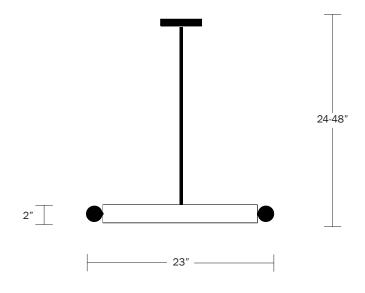

side

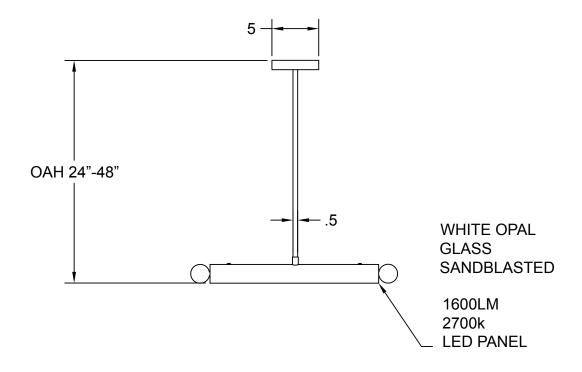



TUBE

flush mount hardwired

Description

The TUBE FLUSH MOUNT expresses a bold beam of light appropriate for bathroom and hallway installations. UL Listed. ADA Compliant. Damp Rated.

Finish Options

Hewn Brass Hand Finished Bronze Brushed Nickel

Dimensions

Overall Height - 4"

Overall Length - 23"

Glass Length - 18"

Glass Diameter - 2"

Depth - 5"

Backplate Diameter - 5"

Weight

6 lbs

Lamp

16 Watt Integrated LED Panel
100 Watt Equivalent
1600 Lumens
2700K Color Temperature
Dimmable and Flicker-Free
Triac & ELV Compatible
Panel Life 50,000 Hours
UL/CE Listed
Damp Rated

